

10.1" Modero X[®] Series Wall Mount Touch Panel no Camera, no Microphone

MXD-1000-P-NC (FG5968-25) Portrait Wall Mount Touch Panel no Camera, no Microphone MXD-1000-L-NC (FG5968-26) Landscape Wall Mount Touch Panel no Camera, no Microphone





Overview

The MXD-1000-NC / 10.1" Modero X® Series Wall Mount Touch Panel (No Camera, No Microphone) is specifically designed to exclude the camera, Near Field Communication™ (NFC), microphone and Bluetooth functions of the original Modero X Series panel to meet the security requirements of facilities that do not allow these capabilities.

The Modero X Series Touch Panels provide several industry firsts including a beautiful, capacitive multi-touch screen that provides users access to multiple applications with minimal navigation. The distinctive, low-profile design is engineered to sit perfectly on a table without obstructing views, and comes with a variety of mounting options for added security and convenience.

Common Applications

The MXD-1000-P-NC and MXD-1000-L-NC are ideal for federal, state, and local government or military facilities with strict security restrictions due to the storage, use, discussion or electronic processing of sensitive or classified information. They feature modifications to support the added security measures necessary in secure environments such as sensitive compartmented information facilities, emergency operations centers or command headquarters. These modified panels give users robust functionality and capabilities while adhering to essential operational security guidelines.

Features

- Graphic Leaps & Bounds The Modero X Series features intuitive UI functionality including: gesturing, swiping, dynamic reordering and enhanced animation capabilities
- **Perfect From Any Angle** Includes In-Plane Switching (IPS), the latest technology in popular tablet/mobile devices that delivers the widest viewing angles and the most accurate color reproduction on the market
- Available Rack Mounting Kit As an option, you can mount the 10.1" Modero X Series Landscape Wall/Flush
 Mount Touch Panel directly to an equipment rack using the MXA-RMK-10 Modero X Series Rack Mount Kit
 (FG5969-62). The Kit includes a rack mount frame, screws and washers

Specifications

TOUCH SCREEN DISPLAY	
Display Type	TFT Active Matrix Color LCD with In-plane Switching Technology (IPS)
Display Size (WH)	Landscape: 9.9" x 6.7" (252 mm x 170 mm), Portrait: 6.7" x 9.9" (170 mm x 252 mm), 12.0" (304 mm) diagonal
Viewable Area (WH)	Landscape: 8.5" x 5.3" (217mm x 136mm), Portrait: 5.3" x 8.5" (136 mm x 217 mm), 10.1" (257mm) diagonal
Resolution (WH)	Landscape: 1280x800, Portrait: 800x1280
Aspect Ratio (WH)	Landscape: 16:9, Portrait: 9:16
Brightness	400 cd/m2
Contrast Ratio	700:1
Color Depth	264K colors
Illumination	LED
Touch Overlay	Projected Capacitive, multi-touch support, 3 simultaneous max
Viewing Angle	Vertical ± 89°, Horizontal ± 89°

MEMORY	
SDRAM	512 MB
Flash	4 GB
Maximum Project Size	2.4 GB flash available to user


COMMUNICATIONS	
ETHERNET	10/100 port, RJ-45 connector. Supported IP and IP- Based Protocols: UCP, TCP, ICMP, ICSP, IGMP, DHCP, Telnet, FTP, DNS, RFB (for VNC), HTTP
USB	(2) USB host 2.0, Type A ports (1 with limited physical access requiring right angle connection): Firmware upgrade, touch panel file transfer, JPEG image viewer, HID peripherals, USB audio output for headsets (1) Micro-USB device port: Disabled

VIDEO	
Supported Video Codecs, Landscape Model (FG5968-13)	MPEG-2-TS: MPEG-2 Main Profile @ High Level up to 720p at 25 fps (decode only)
	MPEG-2-TS: H.264 High Profile @ Layer 4, AAC-LC up to 720p at 25 fps (decode)
	MJPEG up to 720p at 25 fps (decode only)
Supported Video Transport Streams	MPEG-TS for MPEG-2 and H.264; HTTP for MJPEG

Max Number of Active Video Streams	One decode
AUDIO	
Speakers	4 ohm, 2 Watt, 300 Hz cutoff frequency
Supported Audio Codecs	MP2 Layer I and II, MP3 (8 kHz, 11.025 kHz, 12 kHz, 1 kHz, 22.05 kHz, 24 kHz, 32 kHz, 44.1 kHz, 48 kHz) AAC-LC (8 kHz, 96 kHz) G.711 with μLaw (VoIP encode/decode at 8 kHz)
File Formats	WAV, MP3 (as part of touch panel file only - no USB storage)
GRAPHICS ENGINE	
AMX G4	G4 enhanced feature set supporting multi-touch and gestures, scrolling, transitions - See TPD4 Operations Guide for more information
EMBEDDED APPLICATIONS	
Remote Management	VNC Server, G4 Web Control, AMX Resource Management Suite
FRONT PANEL COMPONENTS	
Light Sensor	Photosensitive light detector for automatic adjustme of the panel brightness
Proximity Detector	Max range = 3 ', typ range = 1 ', FOV = 1 0 degrees
Sleep Button	Sleep button to activate sleep mode and powering of Also provides access to setup pages (can be disabled)
CONNECTIONS	
Ethernet	10/100 port, RJ-45 connector
USB	(2) USB host 2.0, Type A ports
	(1) Micro-USB device port: Disabled
Power	PoE (Power over Ethernet), 802.3af, class 3
ENVIRONMENTAL	
Temperature (Operating)	32° F to 104° F (0° C to 40° C)
Temperature (Storage)	4° F to 140° F (-20° C to 60° C)
Humidity (Operating)	20% to 85% RH
Humidity (Storage)	5% to 85% RH
Power ("Heat") Dissipation	On: 21.3 BTU/hr Standby: 10.6 BTU/hr
GENERAL	
Dimensions (HWD)	Landscape: 6 11/16" x 9 7/8" x 2 5/8" (171 mm x 252 mm x 67 mm), Portrait: 9 7/8" x 6 11/16" x 2 5/8" (25 mm x 171 mm x 67 mm)
Weight	2.0 lbs (0.91 Kg)
Power Consumption	Full-On: 8 W (max.) Standby: 3.2 W Shutdown: 1 W
Start-Up Inrush Current	Not applicable due to PoE standard
External Power Supply Required	Optimal performance requires use of one of the
	following AMX PoE power supplies (not included):

	T
	PS-POE-AF-TC, PoE Injector, 802.3AF Compliant
	(FG423-83)
	 NXA-ENET8-2POE, Gigabit PoE Ethernet Switch
	(FG2178-63)
Regulatory Compliance	FCC Part 15 Class B
	CE EN 55022
	CE EN 55024
	CE EN 60950-1
	IEC 60950-1
	C-Tick CISPR 22 Class B
	IC
	UL 60950-1
	RoHS
	WEEE
Included Accessories	MXA-USB-C, USB Port Cover Kit, Modero X/S Series
	Touch Panel (FG5968-18)
	MXA-CLK, Modero X/S Series Cleaning Kit (FG5968-
	16)
Optional Accessories	MXA-FMK-10, Flush Mount Kit, 10" Modero X Wall
Optional Accessories	Mount (FG5968-70)
	MXA-RMK-10, Rack Mount Kit for 10" Modero X
	Series Landscape Wall Mount Touch Panel (FG5969-
	62)
	MXA-MP, Modero X/S Series Multi Preview (FG5968-
	20)
	MXA-MPL, Modero X/S Series Multi Preview Live
	(FG5968-10)
	PS-POE-AF-TC, PoE Injector, 802.3AF Compliant
	(FG423-83)
	• CB-MXP10, Rough-In Box and Cover Plate for the 10"
	· · ·
	Wall Mount Modero X Series Touch Panels (FG039-17)
	CB-MXP10-F, Flush Mount Rough-In Box and Cover Cover
	Plate, for use with MXA-FMK-10 Flush Mount Kit for
	10.1" Modero X Wall Mount Touch Panels (FG5968-84)
	MXA-CLK, Modero X/S Series Screen Cleaning Kit
	(FG5968-16)
	•NXA-ENET8-2POE, Gigabit Ethernet Switch (FG2178-
	63)
	 MXA-USB-C, USB Port Covers for the Modero X/S
	Series Touch Panels (FG5968-18)

For a more detailed pictorial drawing please visit: http://www.amx.com/products/MXD-1000-NC.asp

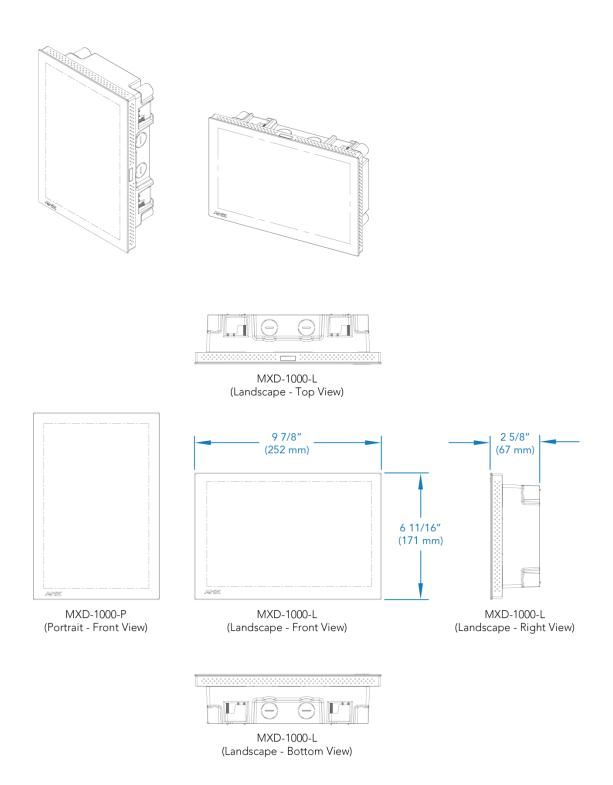

About AMX by HARMAN

Founded in 1982 and acquired by HARMAN in 2014, AMX® is dedicated to providing AV solutions for an IT World. AMX solves the complexity of managing technology with reliable, consistent and scalable systems comprising control, video switching and distribution, digital signage and technology management. AMX systems are deployed worldwide in conference rooms, classrooms, network operation/command centers, homes, hotels, entertainment venues and broadcast facilities, among others. AMX is part of the HARMAN Professional Group, the only total audio, video, lighting, and control vendor in the professional AV market. HARMAN designs, manufactures and markets premier audio, video, infotainment and integrated control solutions for the automotive, consumer and professional markets. Revised 06.20.16. ©2016 Harman. All rights reserved. Specifications subject to change.

www.amx.com | +1.469.624.7400 |800.222.0193