

# H.264 Compressed Video over IP Encoder

NMX-ENC-N3121 (FGN3121-SA), Stand Alone

NMX-ENC-N3121-C (FGN3121-CD), Card



## Overview

The N3000 Video over IP Series extends the reach of SVSI's Networked AV solutions to the WAN for streaming, video to desktop, digital signage, set-top boxes, or mobile devices applications. Fully integrated with existing Networked AV control options, the N3000 Series delivers the highest quality HD video content at the lowest bandwidth for the most demanding applications. Moving video to or from the Cloud just became a lot easier with the N3000.

The N3000 Series' H.264 compression engine delivers low-latency 1080p60 video at half the bandwidth of comparable encoders. High profile H.264 encoders output unicast or multicast to one or more N3000 Series decoders with the same seamless switching capability as the N1000 and N2000 lines. Multiple selectable streaming protocols (RTP, RTSP, and more) allow for software endpoints during video to the desktop applications or third-party hardware endpoints like Roku, Amino, or Google TV. Adjustable bit-rates from 32-Kbps to 10-Mbps give the highest video fidelity at the lowest bandwidths on the market in keeping with SVSI's commitment to provide unsurpassed Networked AV quality.

**H.264 decoder with expanded LocalPlay. Includes IR, serial, balanced audio, and two network ports (one POE). Digital video output only. H.264 decoder card with expanded LocalPlay, requires NMX-ACC-N9206 cage.**

## Common Applications

- The NMX-ENC-N3121 is the perfect solution for quality streaming over low bit rate WAN. Common applications include distance education, Multi-Site Enterprise, and IPTV Streaming.

### Features

- **Input and Output Scaling** – Video scaling at either input or output allows seamless switching from any source, at any resolution, to any display or projector, while preserving video fidelity.
- **Power Over Ethernet (PoE)** – Eliminates requirement for local power supply and speeds installation. Units can still be powered locally from 12VDC allowing for easy rack-mountable, high-density installations.
- **Infrared (IR)** – Infrared emitter connection allows control of low-cost, IR-only display devices.
- **Onboard Control** – All N-Series encoders and decoders have on-board, built-in control capability via events that can trigger any number of TCP/UDP commands to other IP controllable devices.
- **Unlimited Scalability**
- **Pass-Through DVI** – DVI interface allows easy installation with local display such as desktop PC applications.
- **Stand Alone or Card** – Available as a stand alone device, or card for use with NMX-ACC-N9206.

### Specifications

VIDEO	
Digital Video Input	HDMI (through adapter), DVI-I,
Analog Video Input	RGB/VGA, Component  VGA and Component are supported through a passive adapter
Video Output	Network video over Ethernet via RJ45 port, DVI-D, HDMI  HDMI is supported through a passive adapter
Formats	HDMI (through adapter), DVI-D, DVI-I, Dual-Mode DisplayPort (DP++), HDCP content protection support, RGBHV, YPbPr  HDMI and Dual-Mode DisplayPort (DP++) are supported through a passive adapter
Progressive Input Resolutions	Supports most common HD up to 1080p60. See website for all supported resolutions.
Interlaced Input Resolutions	Supports 1080i60. See website for all supported resolutions.
Analog Input Resolutions	Supports most common HD up to 1080p60. See website for all supported resolutions.
Note	Input resolutions supported @60Hz refresh rates are also supported @59.94Hz.
Analog-to-Digital Conversion	8-bit 150 MHz per each of three color channels
Note	The N3121 Encoder does not accept Composite or S-Video (YC).
Output Resolutions	Matched to inputs

AUDIO	
Input Signal Types	Embedded audio on DVI-D or HDMI (through adapter), or Analog Stereo (Balanced or Unbalanced).
Output Signal Types	Ethernet
HDMI Audio Formats	Stereo 2-channel
Analog Audio Formats	Stereo 2-channel
Analog-To-Digital Conversation	16-bit 32 kHz, 44.1 kHz and 48 kHz

LATENCY	
Latency	175 ms at 60 fps
Note:	<ul style="list-style-type: none"> <li>• This is the combined encode plus decode latency. Total latency from source to screen will also include any</li> </ul>

	<p>network latency.</p> <ul style="list-style-type: none"> <li>Scaling adds one frame of latency (17ms at 60fps)</li> </ul>
--	---

COMMUNICATIONS	
Ethernet	10/100/1000 Mbps, auto-negotiating, auto-sensing, full/half duplex, DHCP, Auto IP, and Static IP.
HDMI	HDCP, EDID management
Network Stream	A/V Compression: H.264 high profile video, AAC audio Network Standards: MPEG-TS, RTP, RTSP, HTTP-live, RTMP

PORTS	
+12V 2A	One 12 Volt DC power input
P0	8-wire RJ45 female 10/100/1000 Mbps 10/100/1000Base-T auto-sensing gigabit Ethernet switch port Provides network connection, network AV video, and power to the Encoders and Decoders
P1	8-wire RJ45 female 10/100/1000 Mbps 10/100/1000Base-T auto-sensing gigabit Ethernet switch port. Provides network connection
IR	2-pin terminal Phoenix connector. Provides Infrared (IR) output only (33-60 kHz; typically 39 kHz). Emitter may be necessary (not included)
RS232	3-pin terminal Phoenix connector which provides a serial control interface. Full duplex communication. Available terminal speed settings: 1200-115200 baud rate
AUDIO	5-pin terminal Phoenix connector which provides user-selectable balanced/unbalanced input. Dedicated audio input
DVI-D OUT	DVI-D female; HDMI/DVI digital video/audio output. Allows for video and embedded digital audio output.
DVI-I IN	DVI-I female; HDMI/DVI digital video/audio input. Allows for the use of analog or digital video sources (as well as embedded audio).
Note	DVI-D output is the digitally converted analog signal from the DVI-I input. Appropriate adapter or interface cable required for DVI to accommodate HDMI. With the right adapter, the DVI-I Input port accepts component signals.

CONTROLS AND INDICATORS – FRONT PANEL	
RESET Button	<p>Recessed pushbutton</p> <p>Press to initiate a 'warm restart' causing the processor to reset, but not lose power. A reset does NOT affect the current settings</p>
ID Button	<p>Recessed pushbutton</p> <p>Press to send a notification out on the network to identify the unit (the notification causes a pop-up dialog in N-Able and N-Command)</p>
POWER LED	<p>On solid (green) when operating power is supplied (via PoE or local power supply)</p> <p>This activity is also shown by the <b>PWR</b> LED on the rear</p>

	panel
STATUS LED	On flashing (green) when there is software activity  This activity is also shown by the STAT LED on the rear panel

CONTROLS AND INDICATORS – REAR PANEL	
PWR LED	Same as <b>POWER</b> LED described above
HDMI LED	On (green) when there is a connection to a valid video source
STAT LED	Same as <b>STATUS</b> LED described above
STRM LED	On (green) when the unit is streaming video

POWER SUPPLY	
Power Supply, External, Not Included	2.0 Amp @ 12 Volts DC; 100-240 Volts AC power supply; <b>Not included in shipment.</b> NMX-ACC-N9312 (FGN9312)
Power over Ethernet (PoE)	Can be powered via a PoE switch or other equipment with a PoE source. Conforms to IEEE 802.3af Class 3 (802.3at Type 1).
Note	In order for the unit to receive Power over Ethernet (PoE), it must be connected to a switch or other equipment that has a PoE PSE (Power Sourcing Equipment) port. Warning: Do not run wiring that is connected to a PoE PSE port outside of the building where the PSE resides. It is for intra-building use only. PoE does not pass through the daisy chain (P1) port.

ENVIRONMENTAL	
Temperature	32° to 104°F (0° to 40°C)
Humidity	10% to 90% RH (non-condensing)
Heat Dissipation	Up to ~44 BTU/hr

GENERAL	
Dimensions (HWD)	1.05" x 7.888" x 5.5" (2.67 cm x 20.04 cm x 13.8 cm)
Weight	1.55 lbs (0.7 kg)
Mounting Options	Stand alone, surface mount, wall mount, or rack mount  Surface and wall mounting requires (not included): •NMX-ACC-N9101 (FGN9101), Mounting Wings for SVSI N-Series Encoders and Decoders  Rack mounting requires one of the following (not included): •NMX-ACC-N9102 (FGN9102), 1RU Rack Shelf for Two Side-by-Side for SVSI N-Series Encoders and Decoders •NMX-ACC-N9206 (FGN9206), 2RU Rack Mount Cage with Power for Six SVSI N-Series Card Units
Regulatory Compliance	FCC, CE, and NTRL
Recommended Accessories	•NMX-ACC-N9382 (FGN9382), 1RU Power Supply 16-Channel 12V for up to 16 SVSI N-Series Encoders and Decoders •NMX-ACC-N9101 (FGN9101), Mounting Wings for SVSI N-Series Encoders and Decoders •NMX-ACC-N9102 (FGN9102), 1RU Rack Shelf for Two Side-by-Side SVSI N-Series Encoders and Decoders

•NMX-ACC-N9206 (FGN9206), 2RU Rack Mount Cage with Power for Six SVSI N-Series Card Units


## NMX-ENC-N3121 Front View



- 1) Device reset button
- 2) Device ID discovery button

- 3) Power/Status indicators

## NMX-ENC-N3121 Rear View

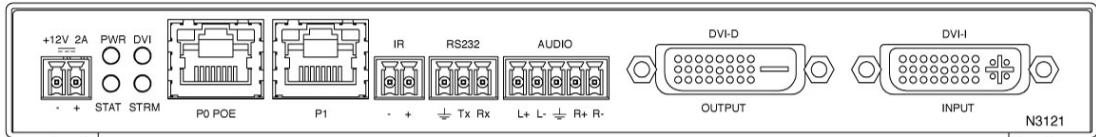

- 1) 12VDC Input (not needed with POE)
- 2) Status Indicators
- 3) RJ-45 auto-sensing gigabit Ethernet switch port – POE (Power Over Ethernet)
- 4) RJ-45 auto-sensing gigabit ethernet switch port

- 5) Infrared (IR) emitter connection
- 6) RS232 connection
- 7) Analog Audio Input connection
- 8) Pass-through DVI-D connection
- 9) DVI-I Digital Video with 7.1 Audio or Analog Video Input

### About AMX by HARMAN

Founded in 1982 and acquired by HARMAN in 2014, AMX® is dedicated to providing AV solutions for an IT World. AMX solves the complexity of managing technology with reliable, consistent and scalable systems comprising control, video switching and distribution, digital signage and technology management. AMX systems are deployed worldwide in conference rooms, classrooms, network operation/command centers, homes, hotels, entertainment venues and broadcast facilities, among others. AMX is part of the HARMAN Professional Group, the only total audio, video, lighting, and control vendor in the professional AV market. HARMAN designs, manufactures and markets premier audio, video, infotainment and integrated control solutions for the automotive, consumer and professional markets. Revised 3.3.16. ©2016 Harman. All rights reserved. Specifications subject to change.

www.amx.com | +1.469.624.7400 | 800.222.0193